


Krypton Wall

WS1040 | 1.0

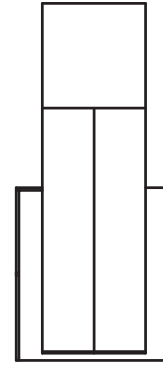

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.




This product is suitable for damp locations.

This product may be dimmed with a low voltage electronic dimmer.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
 Use minimum 90°C supply conductors.

Install the Fixture

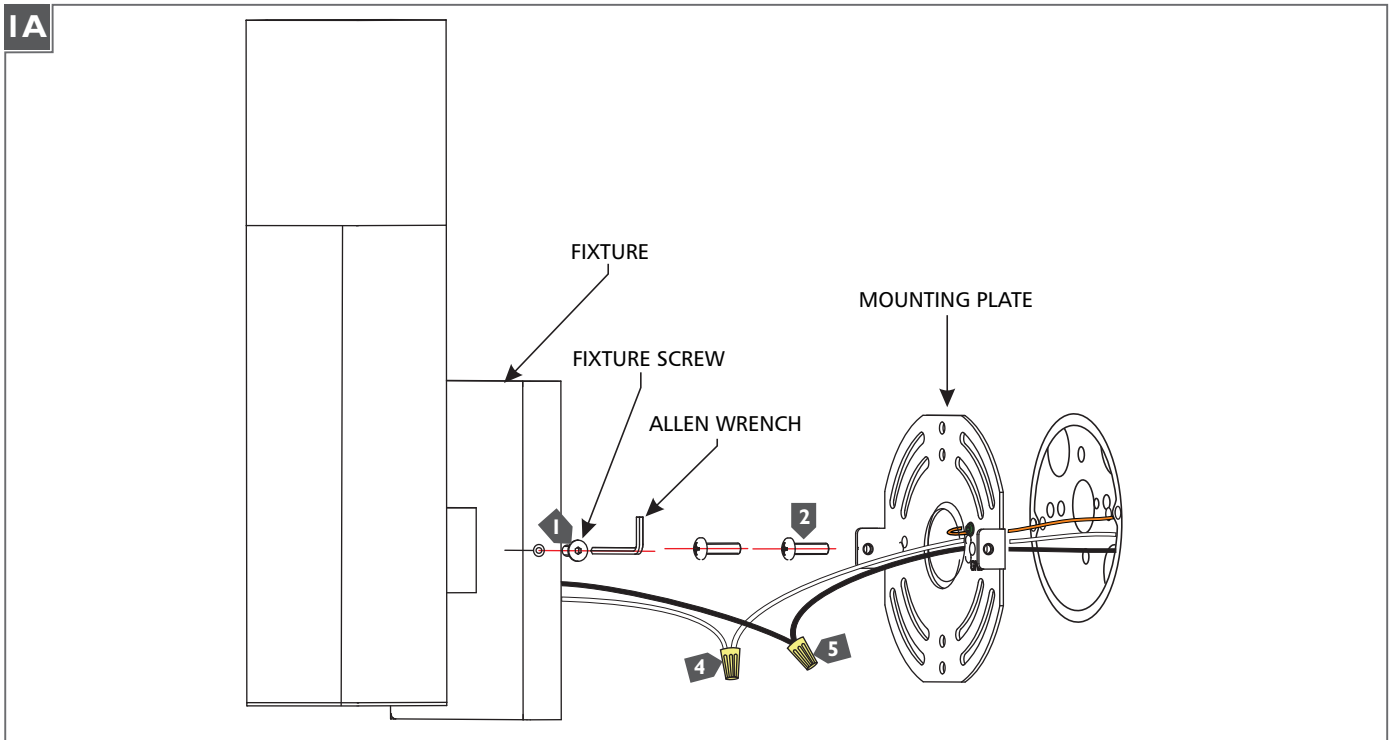

- 1** Remove the fixture screws located on the sides of the fixture base using the provided Allen wrench, then remove the mounting plate from the fixture base.
- 2** Install the mounting plate onto the electrical box with the two #8-32 screws provided.
- 3** Connect the fixture to suitable ground in accordance with local electrical codes.
- 4** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 5** Connect the black fixture wire to the hot power line wire with a wire nut.
- 6** Properly place all wires and wire nut connections into the electrical box, mount the fixture back onto the mounting plate, and reinstall fixture screws (reversal of step 1).

NOTE: This fixture can be mounted in the up or down position.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077
 800.323.3226 - 847.626.6300

www.lblighting.com

© 2018 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.
 A Generation Brands Company